



Composed® | K-73167-4

Single-handle bathroom sink faucet with Lever handle, 1.2 gpm

Features

- Metal construction
- Leak-free ceramic disc valve allows both volume and temperature control
- Complete range of faucets, accessories and showering components to coordinate a full bathroom
- 1.2 gpm (4.5 lpm) maximum flow rate at 60 psi (4.14 bar)



Sustainability



Available Colors/Finishes

Color tiles intended for reference only.

- CP Polished Chrome
- SN Vibrant Polished Nickel
- BN Vibrant Brushed Nickel
- BV Vibrant Brushed Bronze
- BL Matte Black
- 2MB Vibrant Brushed Moderne Brass
- TT Vibrant Titanium
- BGP Vibrant Brushed Graphite



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
4-15-2026 4:1 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

ADA compliant when installed to the specific requirements of these regulations.



ADA

ASME A112.18.1/CSA B125.1
NSF/ANSI/CAN 372
NSF/ANSI/CAN 61
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)
ADA
ICC/ANSI A117.1

Technical Information

All product dimensions are nominal.

Handle

Handle Style/ Type: Lever

Spout

Spout Reach: 5-15/16" (151 mm)

Drain With Overflow: Yes

Flow Rate

Faucet Flow Rate: 1.2 gpm (4.5 l/min)

Valves

Included Valves: Ceramic disc, Thermostatic, Volume Control

Material

- KOHLER finishes resist corrosion and tarnishing

Recommended Products/Accessories


K-23726 Drain treatment
K-23723 Faucet cleaner
K-73146 Double robe hook
K-73141 18" towel bar
K-73142 24" towel bar
K-73144 24" double towel bar
K-73145 Towel arm
K-73148 Vertical toilet paper holder
K-73147 Pivoting toilet paper holder

Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty



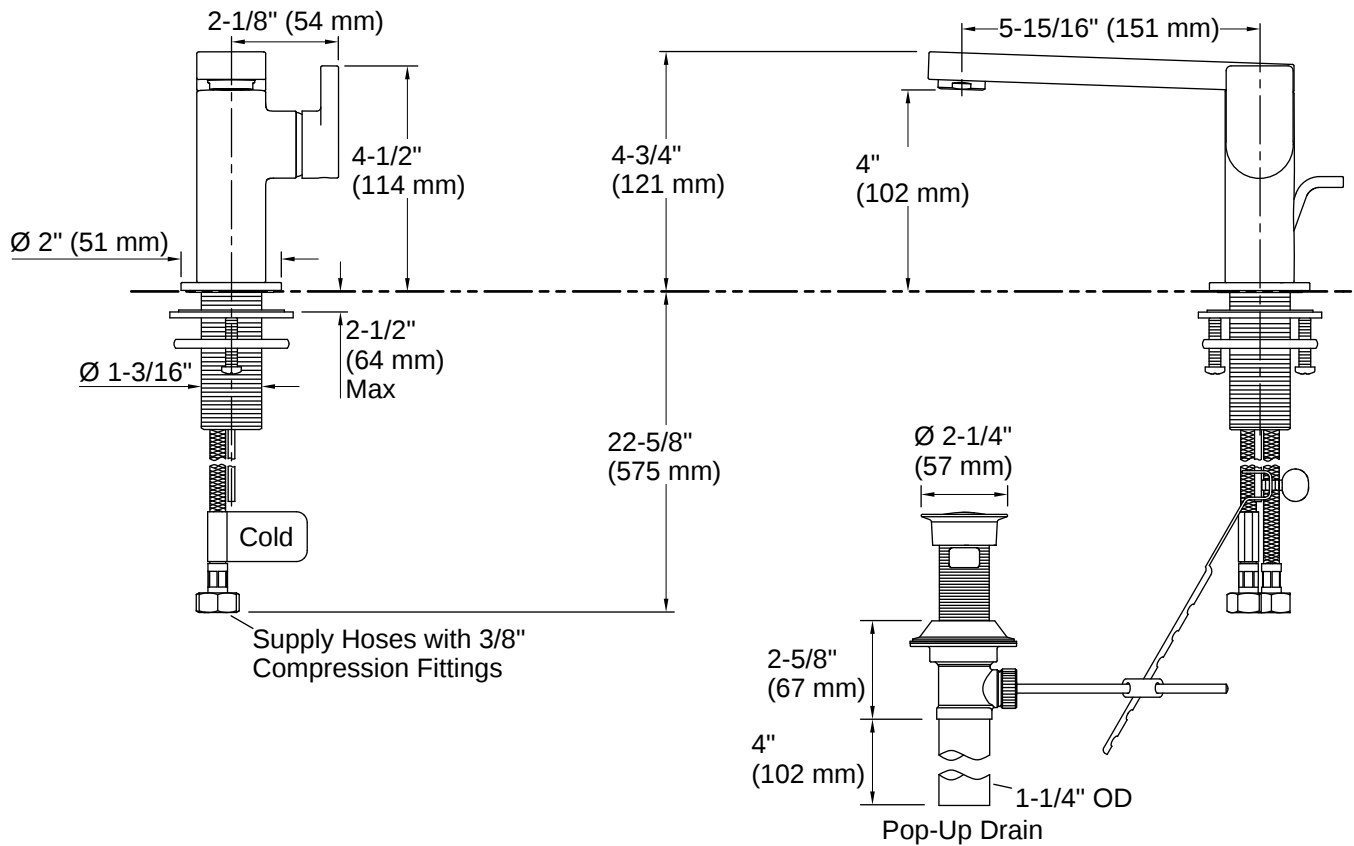

Installation

- Single-hole mounting
- Not compatible with lavatories with centerset drillings

Installation Notes

Install this product according to the installation instructions.

ADA compliant for handles only.

ADA compliant when installed to the specific requirements of these regulations.

