



# Betello® Comfort Height®

Elongated chair height toilet bowl  
K-20148

## Features

- Elongated bowl offers added room and comfort.
- Skirted trapway simplifies cleaning.
- Revolution 360® flushing technology generates a forceful swirling motion to keep the bowl clean longer.
- Comfort Height® feature offers chair-height seating that makes sitting down and standing up easier for most adults.
- 2-1/8" (54 mm) glazed trapway.
- CleanCoat™ surface treatment inhibits the growth of water scale and mineral stains for improved ease of cleaning.
- Combines with the K-20203/-RA or K-20204 tank to create a complete K-20197/-RA Betello™ or K-20198 Betello™ ContinuousClean toilet.
- Patented ReadyLock® installation system, a simple solution for skirted toilets, saves time, hassle, and eliminates the need to drill into the floor for standard 12" (305 mm) rough-in.

## Installation


- Standard 12" (305 mm) rough-in.
- 10" and 14" (254 mm and 356 mm) rough-in kits also available.
- Seat sold separately.

## Recommended Products/Accessories

- K-20203 Toilet tank, 1.28 gpf
- K-20203-RA Toilet tank, 1.28 gpf
- K-20204 1.28 gpf toilet tank with ContinuousClean XT technology
- K-23726 Drain treatment

## Included Components

- Additional Components:
- ReadyLock™ installation system

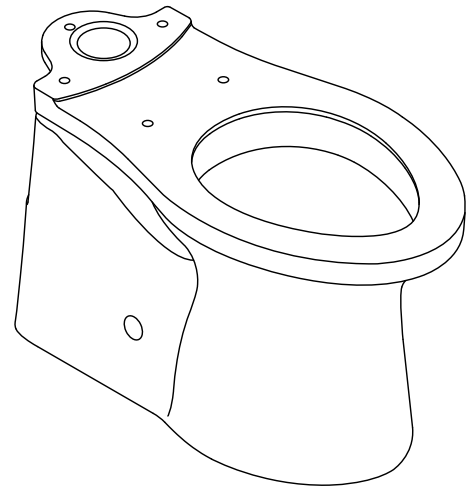

## Codes/Standards

- ASME A112.19.2/CSA B45.1
- EPA WaterSense®

## KOHLER® Toilets and Seats Limited Warranty

See website for detailed warranty information.

## Available Colors/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
-------	------	-------------

	0	White
	96	Biscuit
	NY	Dune
	95	Ice™ Grey
	G9	Sandbar
	7	Black Black™



**Betello® Comfort Height®**  
Elongated chair height toilet bowl  
**K-20148**

No image available.  
This product is a component and not intended to be a standalone installation.

**Technical Information**

All product dimensions are nominal.

Toilet type: Floor-mount

Waste Outlet: Floor

Bowl shape: Elongated

Flush type: Revolution 360®

**Water Consumption**

Full: 1.28 gpf (4.8 lpf)

Water surface size: 9-3/8" x 7-3/16" (238 mm x 183 mm)

Rough-in: 12" (305 mm)

**Fixture Supply Requirements**

Min static pressure: 15 psi (103.4 kPa)

Max static pressure: 80 psi (551.6 kPa)

**Notes**

Install this product according to the installation instructions.