

CLOSET FLANGE

886 series

TKO™

SPECIFICATION

Sioux Chief 886 series TKO closet flanges shall be used where necessary in drainage systems. Flange shall have a full-swivel, corrosion-proof stainless steel ring, with sufficient holes for securing to floor and slots for inserting closet bolts. Flange shall have a knockout, sized larger than the opening, which comes out in one piece preventing it from falling down the drain line. Flange shall have a 3" Sch. 40 spigot connection which conforms to ASTM D2665 (PVC) or D2661 (ABS). Flange shall hold a standard head test and be UPC listed. Always fasten closet flanges to the floor.

MATERIALS

flange body: PVC, ABS

flange ring: 18 gauge 430 stainless steel


DIMENSIONS

A: connection	3" Sch. 40 spigot
B: ring diameter	7"
C: screw hole centers	6"
D: knockout diameter	3"
E: overall height	2"
F: tailpiece length	1½"

Item # Submitted	_____
Job Name	_____
Location	_____
Engineer	_____
Contractor	_____
PO#	_____ TAG _____



886-PTMS

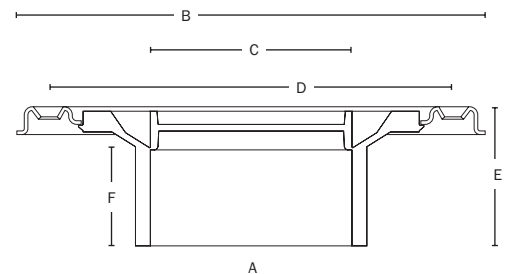

Create Item Number

886-A

e.g. 886-PTMS = 3" PVC spigot closet flange with TKO knockout

- A CONNECTION TYPE
- ☐ ATMS ABS Sch. 40 spigot
 - ☐ PTMS PVC Sch. 40 spigot