



KW Series II

Oil-Fired Hot Water Boiler



**Optional HydroLevel
Boiler Control with
LWCO Protection**



The Pennco KW Series Boiler is an Affordable Oil-Fired Home Heating Solution

Quality Heat Exchanger Design –

The KW Series features a dependable cast iron heat exchanger with cast iron push nipples. The sections and push nipples expand at the same rate when heated. By using similar materials instead of less expensive gaskets or steel push nipples, the boiler maintains a water tight seal.

Efficiency –

The KW Series provides an annual fuel utilization efficiency of up to 86.1% as certified by the US Department of Energy.

Warranty –

20 Year Limited Heat Exchanger Warranty

Choice of Two Operating Controls–

Honeywell or HydroLevel 3250

- Standard Honeywell control, with digital display and diagnostics, monitors water temperature and delays burner from starting until the residual heat energy within the boiler is consumed.
- Optional HydroLevel 3250, with digital display and diagnostics, adjusts the water temperature based on your heating system demand which further reduces your heating costs. It also features a built-in low water cut-off (LWCO) to protect the boiler from potentially dangerous low water conditions.


Pennco SILVER makes Simple Comfort, Affordable.

KW Series II

Oil-Fired Hot Water Boiler

Standard Equipment:

- Assembled boiler with insulated jacket
- Completely installed and wired
 - Beckett AFG Series Oil Burner equipped with:
 - Oil Nozzle
 - Primary Control
 - CAD Cell
 - PSC Motor
 - Interrupted Duty Ignition and Clean Cut Pump
- FlueBrush
- Target Wall (Vacuum Formed)
 - Refractory Ceramic Fiber)
- DuraBlanket Insulation Chamber
- Barometric Draft Control 6"
- Combination Temperature/Pressure Gauge
- Pre-wired 5' pump harness for supply or return mounting in the field
- 3/4" Boiler Drain Valve
- 30 psi ASME Relief Valve

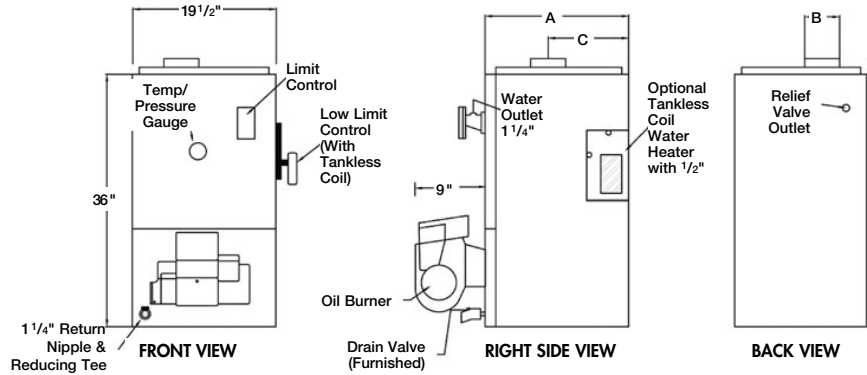

Specifications: (All ratings and specifications subject to change)

Model	Number of Sections	Input		Heating Capacity MBH (1) (2)	Net AHRI Rating, Water (MBH) (1) (5)	Minimum Chimney Size/Height	Dimensions (inches)			AFUE % (4)
		G. P. H. (3)	MBH (1)				A	B	C	
3KW0.60*	3	0.60	84	74	64	8"x8"x15'	17-3/4	6	9-3/4	86.1
3KW0.75	3	0.75	105	92	80	8"x8"x15'	17-3/4	6	9-3/4	85.6
3KW1.00*	3	1.00	140	120	104	8"x8"x15'	17-3/4	6	9-3/4	84.4
4KW.90*	4	0.90	126	111	97	8"x8"x15'	21	6	11-3/8	86.0
4KW1.25*	4	1.25	175	153	133	8"x8"x15'	21	6	11-3/8	85.9
4KW1.50	4	1.50	210	181	157	8"x8"x15'	21	6	11-3/8	85.1
5KW1.20*	5	1.20	168	147	128	8"x8"x15'	24-1/4	6	13	86.1
5KW1.75	5	1.75	245	210	183	8"x8"x15'	24-1/4	6	13	85.0
5KW2.00*	5	2.00	280	239	208	8"x8"x20'	24-1/4	6	13	84.0

* These firing rates available only with alternate firing rate kits.

- 3 Section Firing Rate Kit 550002646

- 4 Section Firing Rate Kit 550002674

- 5 Section Firing Rate Kit 550002648

(1) Mbh = 1,000 BTU per hour [BTU = British Thermal Unit]

(2) Heating Capacity based on 13% CO₂ with a 0.02" w.c. draft over fire, and a #1 smoke or less.

Testing was done in accordance with the D.O.E. (Department of Energy) test procedure.

(3) G.P.H. = Gallons per hour oil at 140,000 BTU per gallon

(4) A.F.U.E. = Annual Fuel Utilization Efficiency based upon D.O.E. test procedure.

(5) Net AHRI Water Ratings based on piping and pickup allowance of 1.15.

Consult manufacturer before selecting boiler for installations having unusual piping and pickup requirements, such as intermittent system operation, extensive piping systems, etc.



2201 Dwyer Avenue, Utica, New York 13501
 Phone: 315-797-1310 • Fax: 866-432-7329
 E-mail: info@ecrinternational.com
 Web: www.pennco boilers.com

USA Contractor Assistance:
 800-325-5479