

Features

- Metal construction
- Brass valve bodies
- Quarter-turn washerless ceramic disc valves
- Flexible connections for easy installation
- Pop-up drain with lift rod and tailpiece
- 5" (127 mm) spout reach
- For 8" (203 mm) or 16" (406 mm) centers
- Stationary spout
- 1.5 gallons (5.7 liters) per minute maximum flow rate

**WIDESPREAD BATHROOM SINK FAUCET
K-12265**


ADA **CSA B651** **OBC**



Codes/Standards Applicable

Specified model meets or exceeds the following at date of manufacture:

- ADA
- ICC/ANSI A117.1
- CSA B651
- OBC
- ASME A112.18.1/CSA B125.1
- NSF 61
- All applicable US Federal and State material regulations
- EPA WaterSense®

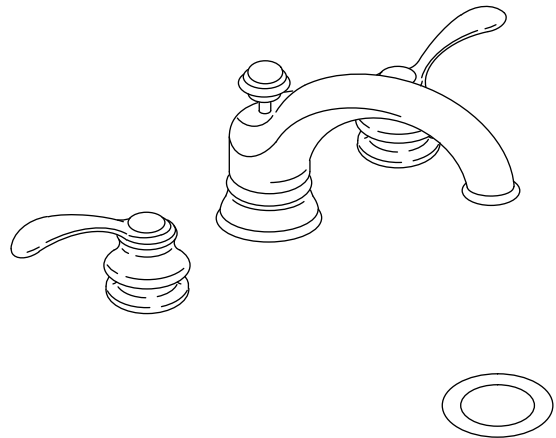

Colors/Finishes

- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- NA: None applicable
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Color/Finish		
K-12265-4	Widespread bathroom sink faucet	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other _____
Optional Accessories				
K-12003	Two-handle plug button set			<input type="checkbox"/> Other _____
_____	Additional flow options are available (refer to the Kohler Price Book)	<input type="checkbox"/> NA		

Product Specification

The two-handle widespread bathroom sink faucet shall be made of metal construction with brass valve bodies. Product shall have a maximum flow rate of 1.5 gallons (5.7 liters) per minute. Product shall feature quarter-turn washerless ceramic disc valves. Product shall be for 8" (203 mm) or 16" (406 mm) centers. Product shall feature flexible connections for easy installation and a pop-up drain with lift rod and tailpiece. Product shall feature a stationary spout, a 5" (127 mm) spout reach, and lever handles. Faucet shall be Kohler Model K-12265-4-_____.

