

### Features

- Wide coverage spray produces an encompassing spray for everyday use
- 1.5 gpm (5.7 lpm) maximum flow rate handshower allows you to save water without sacrificing performance or coverage
- Variable-flow lever lets you adjust from 1.5 gpm (5.7 lpm) down to 0.5 gpm (1.9 lpm) water pause for greater conservation during your shower routine
- Sprayface resists hard water buildup and is easy to clean
- Magnetic docking connection allows for handshower height adjustment of 2" (51 mm) and spray angle tilt of 24-58°

### Material

- Premium metal construction for durability and reliability
- KOHLER finishes resist corrosion and tarnishing
- Hose is a durable, flexible polymer blend with soft-touch finish for a hassle-free drape

### Technology

- Katalyst™ air-induction technology infuses water with air, creating bigger drops for a more powerful spray

### Installation

- Wall-mount
- For use in shower-only installations

### Water Conservation & Rebates

- This product can help a building earn Water Efficiency points in LEED™ Green Building Rating System

### Included Components

- K-20998 Single-function handshower, 1.5 gpm
- K-21049 60" shower hose
- K-21051 Wall-mount handshower holder and supply elbow



### Codes/Standards


ASME A112.18.1/CSA B125.1  
DOE - Energy Policy Act 1992  
EPA WaterSense™  
California Energy Commission (CEC)


### KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

### Available Colors/Finishes

*Color tiles intended for reference only.*

| Color   | Code | Description             |
|---|------|-------------------------|
|  | CP   | Polished Chrome         |
|  | BN   | Vibrant™ Brushed Nickel |
|  | BL   | Matte Black             |

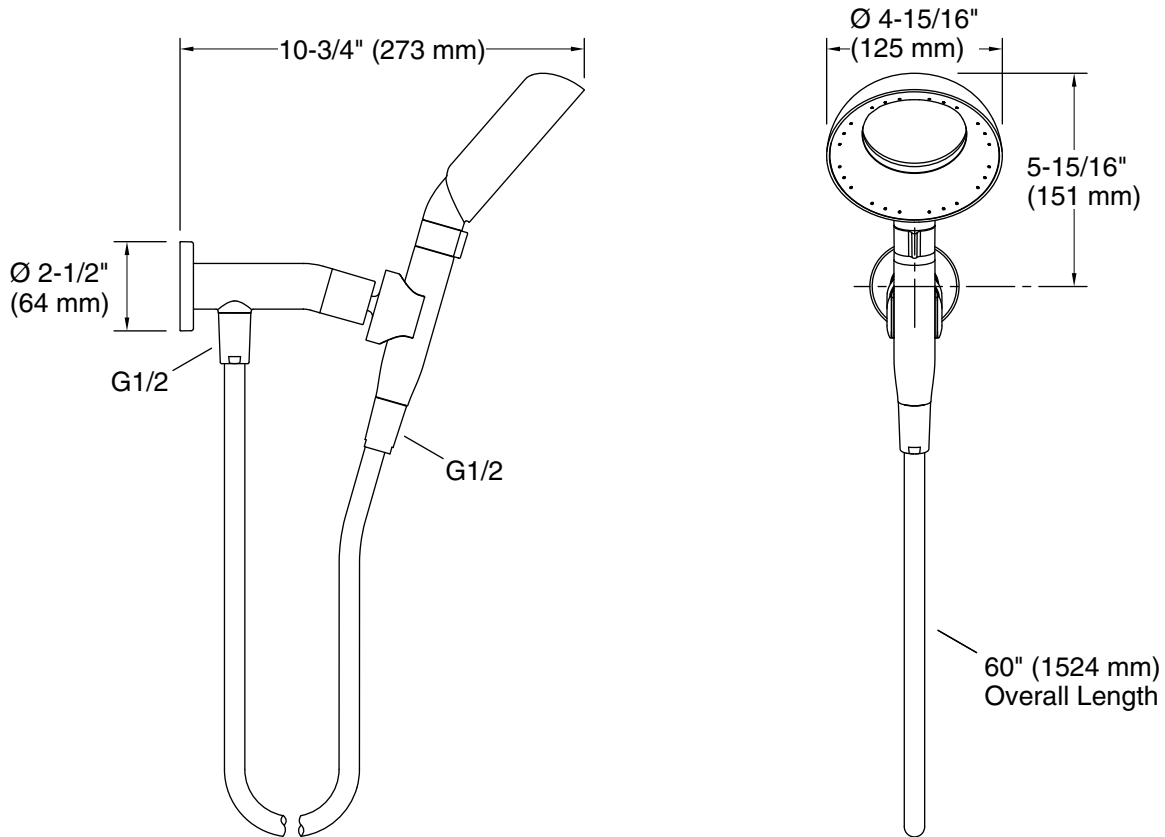

### Technical Information

All product dimensions are nominal.

#### Handshower:

Rated maximum flow: 1.5 gal/min (5.7 l/min)  
Pressure: 45 psi (3.1 bar)