

### Features

- Brass construction
- Single-hole mounting
- Above-counter valve for easy installation and maintenance
- Vandal-resistant aerator
- 24" (610 mm) flexible supply hoses for easy installation
- 6-3/16" (157 mm) spout reach
- Stationary gooseneck spout
- With temperature mixer
- Includes 30-year Hybrid Energy Cell
- Less Drain
- 0.5 gal/min (1.9 l/min) flow rate



For complete listing of available colors, go to [kohler.com](http://kohler.com).

ADA

CSA B651

OBC

### Codes/Standards

ASME A112.18.1/CSA B125.1

NSF 372

ADA

ICC/ANSI A117.1

DOE - Energy Policy Act 1992

CSA B651

OBC

All applicable US Federal and State material regulations

FCC Part 15


ICES-003

See website for detailed warranty information.

### Product Specification

Electronic faucet shall be 6-3/16" (157 mm) spout reach and 9" (229 mm) spout height. Electronic faucet shall be made of brass construction.

Electronic faucet shall be less drain. Electronic faucet shall be with temperature mixer. Electronic faucet shall be single-hole installation. Electronic faucet shall be KOHLER Model K-7519.

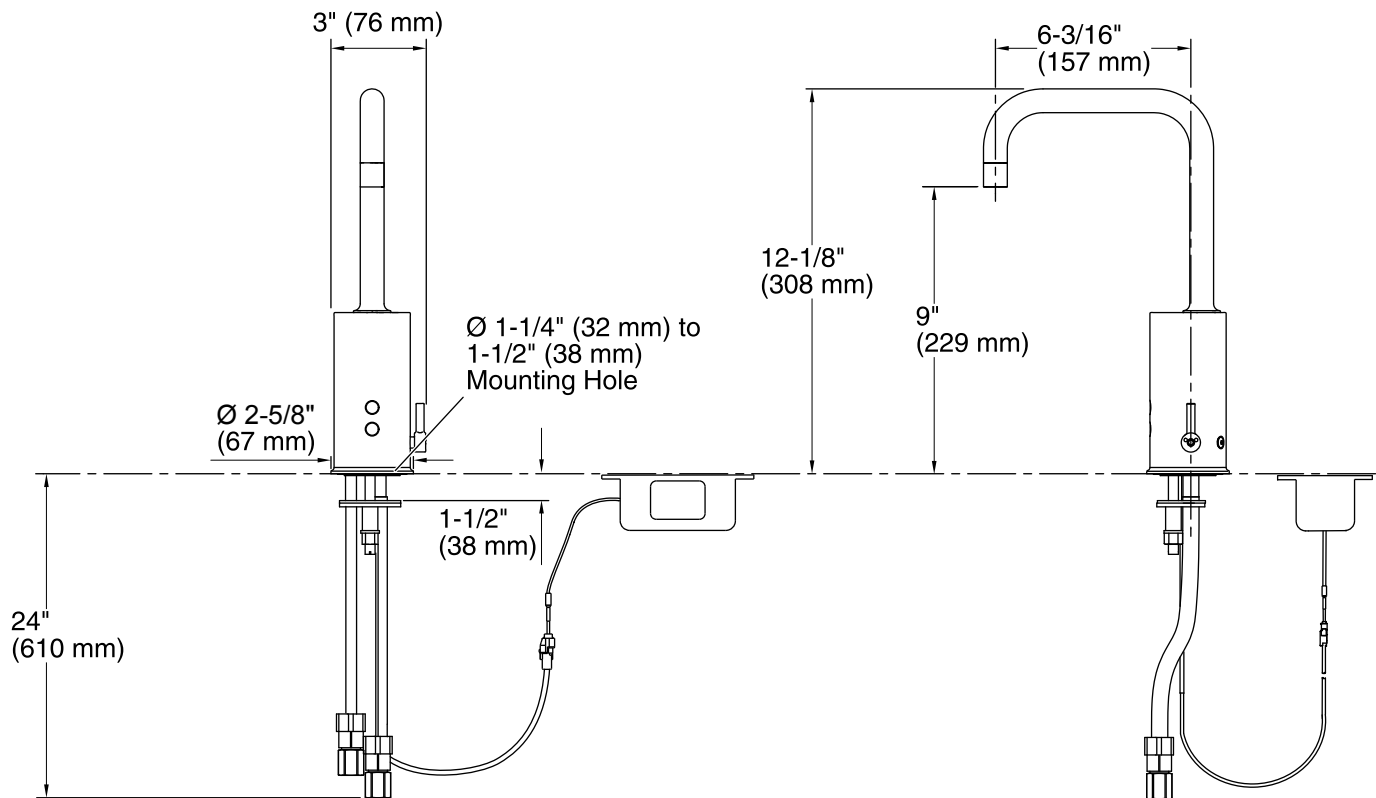

### Technical Information

All measurements are nominal.

Valve body: Machined Brass

#### Faucet:

Flow rate: 0.5 gal/min (1.9 l/min)

Power source: 3.6V Size C (Hybrid Energy Cell), included

### Installation Notes

Install this product according to the installation guide.

A 1-1/4" (32 mm) minimum to 1-1/2" (38 mm) maximum diameter mounting hole is required.

The minimum distance between the back of the faucet spout and the wall must be 1-3/4" (44 mm). This will allow proper clearance for setscrew access.

The maximum distance between the bathroom sink basin edge to the base of the faucet spout must be 1-3/4" (44 mm).

The maximum height of the lip basin should be 3/4" (19 mm).

Product includes rosebud spray aerator. Other aerator styles are available.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.