



## H-x170W Series

Full Port Forged Brass Ball Valve  
w/ Chrome-Plated Lever Handle  
& Adjustable Packing Gland


### Certifications

Certified to NSF/ANSI 61, ANSI Z21.15/CSA 9.1  
Lead-Free

H-5170x models are NOT certified for use with gas.



NO.	DESCRIPTION	MATERIAL
1	Body	Lead-Free Brass
2	End Cap	Lead-Free Brass
3	Seat	PTFE
4	Ball	Brass HCP
5	Stem	Brass
6	Stem Seal	PTFE
7	Packing Gland	Brass
8	Handle	Steel CP (SS for H-x170WSS)
9	Handle Nut	Steel CP (SS for H-x170WSS)
10	Handle Jacket	Vinyl

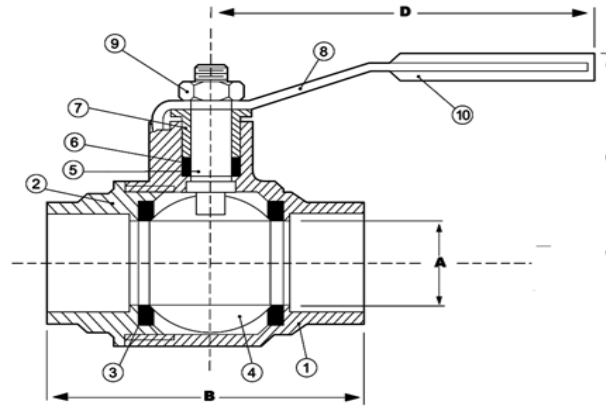

Designed for residential, commercial, or industrial use with water, oil, or gas. This approved Webstone valve is actuated by a blowout proof stem and features an adjustable packing gland. Threaded ends comply with ANSI B1.20.1. ANSI Z21.15/CSA 9.1 certification applies to valves threaded valves size 1/2" to 2" only (base model H-4170xW), up to 1/2 PSI. \*Base model H-5170xW certified to NSF/ANSI 61-8.

ITEM#	Connection Type	SIZE (In)	Pressure Rating	A	B	C	D
H-41700W	FIP	1/4	600 PSI CWP Max/150 WSP	0.38	1.75	1.69	3.56
H-41701W	FIP	3/8	600 PSI CWP Max/150 WSP	0.38	1.75	1.69	3.56
H-41702W	FIP	1/2	600 PSI CWP Max/150 WSP	0.50	2.13	1.69	3.56
H-41703W	FIP	3/4	600 PSI CWP Max/150 WSP	0.75	2.38	2.06	3.81
H-41704W	FIP	1	600 PSI CWP Max/150 WSP	1.00	2.88	2.38	4.50
H-41705W	FIP	1 1/4	600 PSI CWP Max/150 WSP	1.25	5.31	2.63	4.50
H-41706W	FIP	1 1/2	600 PSI CWP Max/150 WSP	1.50	3.69	3.06	5.50
H-41707W	FIP	2	600 PSI CWP Max/150 WSP	2.00	4.13	3.69	5.50
H-41708W	FIP	2 1/2	600 PSI CWP Max/150 WSP	2.50	5.31	4.56	8.63
H-41709W	FIP	3	600 PSI CWP Max/150 WSP	3.00	5.88	4.81	8.63
H-41710W	FIP	4	600 PSI CWP Max/150 WSP	4.00	7.06	5.44	9.63
* H-51702W	SWT	1/2	600 PSI CWP Max/150 WSP	0.50	2.31	2.13	1.75
* H-51703W	SWT	3/4	600 PSI CWP Max/150 WSP	0.75	2.88	2.25	1.75
* H-51704W	SWT	1	600 PSI CWP Max/150 WSP	1.00	3.50	2.63	1.75
H-51705W	SWT	1 1/4	600 PSI CWP Max/150 WSP	1.00	3.50	2.63	1.75
H-51706W	SWT	1 1/2	600 PSI CWP Max/150 WSP	1.25	3.88	2.63	4.50
H-51707W	SWT	2	600 PSI CWP Max/150 WSP	1.50	4.38	3.13	5.50
H-51708W	SWT	2 1/2	400 PSI CWP Max/125 WSP	2.00	5.38	3.38	5.50
H-51709W	SWT	3	400 PSI CWP Max/125 WSP	2.00	5.38	3.38	5.50
H-51710W	SWT	4	600 PSI CWP Max/150 WSP	2.50	6.38	4.63	8.50

ITEM#	Connection Type	SIZE (In)	Pressure Rating	A	B	C	D
<b>w/ Wing Style "T" Handle</b>							
H-41702WT	FIP	1/2	600 PSI CWP Max/150 WSP	0.50	2.50	1.81	2.00
H-41703WT	FIP	3/4	600 PSI CWP Max/150 WSP	0.75	2.50	2.19	2.00
H-41704WT	FIP	1	600 PSI CWP Max/150 WSP	1.00	2.88	2.69	2.00
* H-51702WT	SWT	1/2	600 PSI CWP Max/150 WSP	0.50	2.00	1.63	3.50
* H-51703WT	SWT	3/4	600 PSI CWP Max/150 WSP	0.75	2.75	2.00	4.00
* H-51704WT	SWT	1	600 PSI CWP Max/150 WSP	1.00	3.38	2.38	4.50
<b>w/ 304 Stainless Steel Handle</b>							
H-41702WSSL	FIP	1/2	600 PSI CWP Max/150 WSP	0.50	2.13	1.69	3.56
H-41703WSSL	FIP	3/4	600 PSI CWP Max/150 WSP	0.75	2.25	2.06	3.81
H-41704WSSL	FIP	1	600 PSI CWP Max/150 WSP	1.00	2.88	2.38	4.50
H-41705WSSL	FIP	1 1/4	600 PSI CWP Max/150 WSP	1.25	3.25	2.63	4.50
H-41706WSSL	FIP	1 1/2	600 PSI CWP Max/150 WSP	1.50	3.63	3.06	5.50
H-41707WSSL	FIP	2	600 PSI CWP Max/150 WSP	2.00	4.13	3.69	5.50
* H-51702WSSL	SWT	1/2	600 PSI CWP Max/150 WSP	0.50	2.31	2.13	1.75
* H-51703WSSL	SWT	3/4	600 PSI CWP Max/150 WSP	0.75	2.88	2.25	1.75
* H-51704WSSL	SWT	1	600 PSI CWP Max/150 WSP	1.00	3.50	2.63	1.75
H-51705WSSL	SWT	1 1/4	600 PSI CWP Max/150 WSP	1.25	3.88	2.63	4.50
H-51706WSSL	SWT	1 1/2	600 PSI CWP Max/150 WSP	1.50	4.38	3.13	5.50
H-51707WSSL	SWT	2	600 PSI CWP Max/150 WSP	2.00	5.38	3.38	5.50
<b>w/ 304 Stainless Steel Wing Style "T" Handle</b>							
H-41702WSSW	FIP	1/2	600 PSI CWP Max/150 WSP	0.50	2.50	1.81	2.00
H-41703WSSW	FIP	3/4	600 PSI CWP Max/150 WSP	0.75	2.50	2.19	2.00
H-41704WSSW	FIP	1	600 PSI CWP Max/150 WSP	1.00	2.88	2.69	2.00
* H-51702WSSW	SWT	1/2	600 PSI CWP Max/150 WSP	0.50	2.00	1.63	3.50
* H-51703WSSW	SWT	3/4	600 PSI CWP Max/150 WSP	0.75	2.75	2.00	4.00
* H-51704WSSW	SWT	1	600 PSI CWP Max/150 WSP	1.00	3.38	2.38	4.50