

### Features

- The Awaken handshower features a contemporary design
- Three spray functions and ADA-compliant nonpositive shutoff
- Thumb tab allows for a smooth transition between sprays
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- 36" (914 mm) metal slidebar
- This product can help a building earn Water Efficiency points in LEED® Green Building Rating System

### Material

- KOHLER® finishes resist corrosion and tarnishing
- Premium metal constructed slidebar and shower hose

### Installation

- Adjustable mounting brackets provide flexibility on wall-mount installations

### Recommended Products/Accessories

K-23723 Faucet cleaner

### Optional Products/Accessories

K-98350 wall-mount supply elbow

K-98351 wall-mount supply elbow with check valve



### Codes/Standards






ASME A112.18.1/CSA B125.1  
DOE - Energy Policy Act 1992  
EPA WaterSense®  
California Energy Commission (CEC)  
ADA  
ICC/ANSI A117.1  
IAPMO Certification


### KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

### Available Colors/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
	CP	Polished Chrome
	BN	Vibrant® Brushed Nickel
	2BZ	Oil-Rubbed Bronze
	BL	Matte Black
	2MB	Vibrant® Brushed Moderne Brass

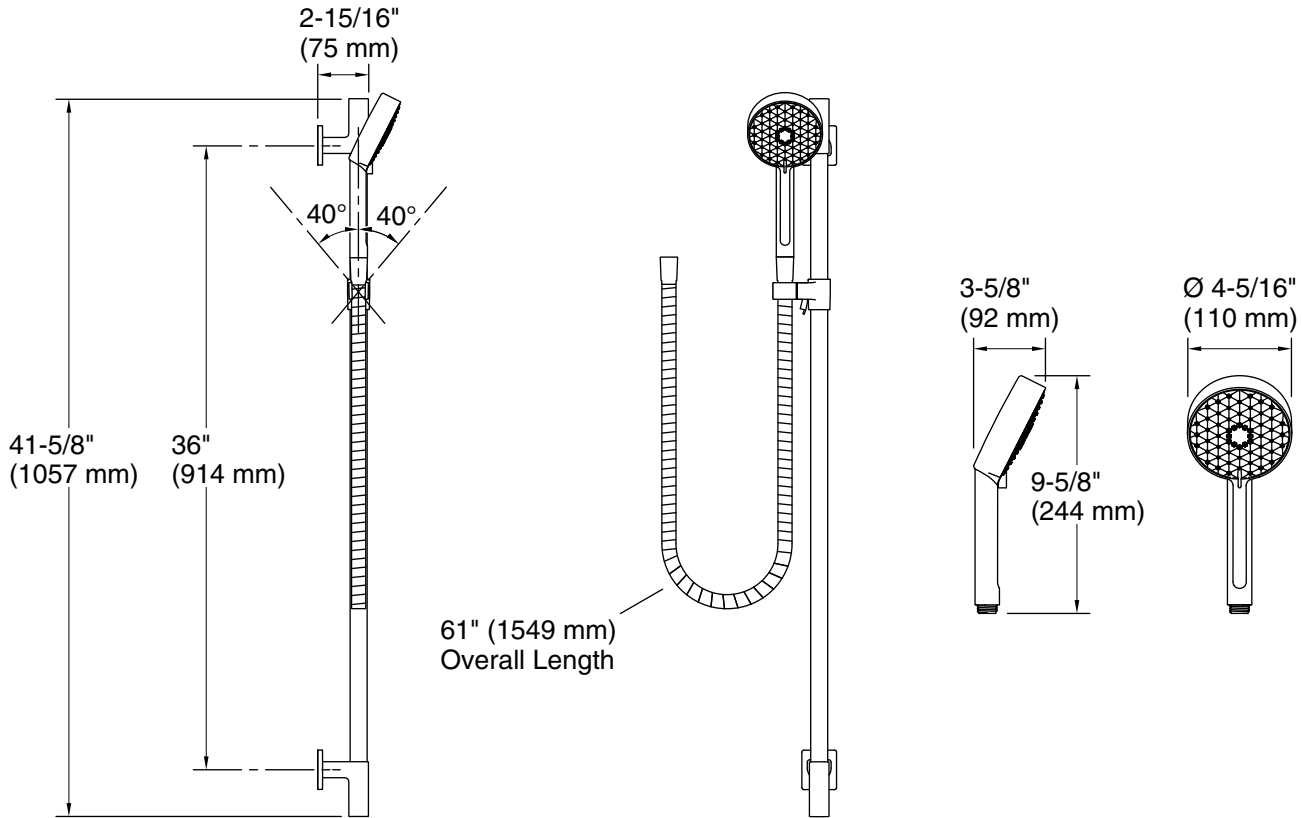

**Technical Information**

All product dimensions are nominal.

**Handshower:**

Rated maximum flow: 1.75 gal/min (6.6 l/min)

**Notes**

Install this product according to the installation instructions.

Plumbing codes require approved backflow prevention devices to be installed in-line to handshowers. Please consult with local plumbing officials.

Mount the slidebar to stud framing or install backing support. For tile or other solid finish surfaces: Pre-drill mounting holes through surface material only; do not drill into the stud. For drywall surface: No pre-drill is required.

ADA compliant when installed to the specific requirements of these regulations.