



## Braukmann AM-1 Series

### LEAD FREE THERMOSTATIC MIXING VALVES

#### SUBMITTAL SHEET

Job Name	
Engineer	
Mechanical Contractor	
Contractor's P.O. No.	
Representative	
Notes	

Model(s)	Qty.	Notes	
	Qty.	Notes	
	Qty.	Notes	
Approval			
Service			
Tag No.			

### APPLICATION

The Resideo AM-1 series accurately adjusts, maintains, and limits the hot water temperature to a desired setting selected by the user. By installing a Resideo AM-1 mixing valve, raising water heater storage temperature setting, and limiting mixed outlet water temperature to a safe temperature, more usable hot water is available.

### SPECIFICATIONS

**Design:** Straight-Through (hot and cold at the same level)

**Maximum Pressure:** 150 psi (1034 kPa)

**Certifications:** ASSE, CSA and IAPMO listed

**Patent Information:** U.S. Patent No. 6,079,625

**Warranty:** 1-year limited warranty

### MATERIALS

**Body:** Teflon®-Coated, Nickel-Plated Low Lead Brass\*

**Temperature Gauge Adapter/Thermowell:** Low Lead Brass


**Shuttle:** Teflon-Coated Low Lead Brass\*

**O-Rings:** EPDM Rubber

Teflon® is a registered trademark of DuPont or its affiliates.

\*Lead Free Plumbing Code Compliance: The wettable surfaces of lead free models contain less than 0.25% of lead by weighted average.

### DIMENSIONS

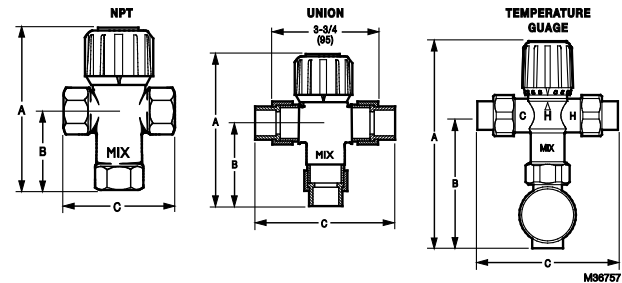

Model Number	Pipe Size	Operating Temp.	CV	ASSE Certs.	Dimensions		
	Inch				A	B	C
<b>NPT</b>							
AM100-1LF	1/2"	70°F - 145°F	3.2	1017	5.8	2.7	3
AM101-1LF	3/4"	70°F - 145°F	3.8	1017	5.8	2.7	3
AM102-1LF	1"	70°F - 145°F	4.3	1017	5.8	2.7	3
<b>Union Sweat</b>							
AM100-US-1LF	1/2"	70°F - 145°F	3.9	1017	5.4	2.8	4.6
AM101-US-1LF	3/4"	70°F - 145°F	3.9	1017	5.6	2.9	4.9
AM102-US-1LF	1"	70°F - 145°F	3.9	1017	6.3	3.7	6.5
AM100C1070-US-1LF	1/2"	70°F - 120°F	1.8	1017, 1070	5.4	2.8	4.6
AM101C1070-US-1LF	3/4"	70°F - 120°F	1.8	1017, 1070	5.6	2.9	4.9
AM102C1070-US-1LF	3/4"	70°F - 120°F	1.8	1017, 1070	6.3	3.7	6.5



Model Number	Pipe Size	Operating Temp.	CV	ASSE Certs.	Dimensions		
	Inch				A	B	C
<b>Union CPVC</b>							
AM100-UCPVC-1LF	1/2"	70°F - 145°F	3.9	1017	5.8	2.8	4.7
AM101-UCPVC-1LF	3/4"	70°F - 145°F	3.9	1017	5.8	2.8	4.7
AM100C1070UCPVC1	1/2"	70°F - 120°F	1.8	1017, 1070	5.8	2.8	4.7
AM101C1070UCPVC1	3/4"	70°F - 120°F	1.8	1017, 1070	5.8	2.8	4.7
<b>Union Threaded</b>							
AM100-UT-1LF	1/2"	70°F - 145°F	3.9	1017	5.9	2.9	4.9
AM101-UT-1LF	3/4"	70°F - 145°F	3.9	1017	6.6	3.8	6.5
AM102-UT-1LF	1"	70°F - 145°F	3.9	1017	6.8	3.9	7
AM100C1070-UT-1LF	1/2"	70°F - 120°F	1.8	1017, 1070	5.9	2.9	4.9
AM101C1070-UT-1LF	3/4"	70°F - 120°F	1.8	1017, 1070	6.6	3.8	6.5
AM102C1070-UT-1LF	1"	70°F - 120°F	1.8	1017, 1070	6.8	3.9	7
<b>Temperature Gauge</b>							
AM100-USTG-1LF/U	1/2"	70°F - 145°F	3.9	1017	7.1	4.5	4.6
AM101-USTG-1LF/U	3/4"	70°F - 145°F	3.9	1017	7.3	4.7	4.9
AM102-USTG-1LF/U	1"	70°F - 145°F	3.9	1017	7.4	4.8	6.5
AM100C1070-USTG-LF	1/2"	70°F - 120°F	1.8	1017, 1070	7.1	4.5	4.6
AM101C1070-USTG-LF	3/4"	70°F - 120°F	1.8	1017, 1070	7.3	4.7	4.9
AM102C1070-USTG-LF	1"	70°F - 120°F	1.8	1017, 1070	7.4	4.8	6.5
AM100R-USTG-1/U	1/2"	70°F - 180°F	3.9	N/A	7.1	4.5	4.6
AM101R-USTG-1/U	3/4"	70°F - 180°F	3.9	N/A	7.3	4.7	4.9
AM102R-USTG-1/U	1"	70°F - 180°F	3.9	N/A	7.4	4.8	6.5

Model Number	Pipe Size	Operating Temp.	CV	ASSE Certs.	Dimensions		
	Inch				A	B	C
<b>Union PEX</b>							
AM100-UPEX-1LF	1/2"	70°F - 145°F	3.9	1017	6.0	3.0	5.1
AM101-UPEX-1LF	3/4"	70°F - 145°F	3.9	1017	6.0	3.0	5.1
AM100C1070-UPEX1LF	1/2"	70°F - 120°F	1.8	1017, 1070	6.0	3.0	5.1
AM101C1070-UPEX1LF	3/4"	70°F - 120°F	1.8	1017, 1070	6.0	3.0	5.1
<b>Union Press Fittings</b>							
AM100-UP-1LF/U	1/2"	70°F - 145°F	3.9	1017	5.9	3.3	5.6
AM101-UP-1LF/U	3/4"	70°F - 145°F	3.9	1017	6.2	3.6	6.3
AM102-UP-1LF/U	1"	70°F - 145°F	3.9	1017	6.5	3.8	6.7
AM100C1070-UP-1LF	1/2"	70°F - 120°F	1.8	1017, 1070	5.9	3.3	5.6
AM101C1070-UP-1LF	3/4"	70°F - 120°F	1.8	1017, 1070	6.2	3.6	6.3
AM102C1070-UP-1LF	1"	70°F - 120°F	1.8	1017, 1070	6.5	3.8	6.7
AM100R-UP-1/U	1/2"	70°F - 180°F	3.9	N/A	5.9	3.3	5.6
AM101R-UP-1/U	3/4"	70°F - 180°F	3.9	N/A	6.2	3.6	6.3
AM102R-UP-1/U	1"	70°F - 180°F	3.9	N/A	6.5	3.8	6.7
<b>Push Connect</b>							
AM100-SB-1LF/U	1/2"	70°F - 145°F	3.9	1017	6.9	4.2	7.5
AM100C1070-SB-1LF	1/2"	70°F - 120°F	1.8	1017, 1070	6.9	4.2	7.5
AM101-SB-1LF/U	3/4"	70°F - 145°F	3.9	1017	8.1	5.5	10.0
AM101C1070-SB-1LF	3/4"	70°F - 120°F	1.8	1017, 1070	8.1	5.5	10.0
AM102-SB-1LF/U	1"	70°F - 145°F	3.9	1017	8.2	5.5	10.1
AM102C1070-SB-1LF	1"	70°F - 120°F	1.8	1017, 1070	8.2	5.5	10.1

By using this Resideo literature, you agree that Resideo will have no liability for any damages arising out of your use or modification to, the literature. You will defend and indemnify Resideo, its affiliates and subsidiaries, from and against any liability, cost, or damages, including attorneys' fees, arising out of, or resulting from, any modification to the literature by you.



Resideo Technologies, Inc.  
1985 Douglas Drive North, Golden Valley, MN 55422  
1-800-468-1502  
68-3103—06 M.S. Rev. 11-21 | Printed in United States