



# Ensemble™

32" (813 mm) Bath  
71121120




## Features

- Durable high-gloss finish provides a smooth, shiny surface that is easy to clean.
- Extra deep bathing well for added comfort.
- Bath and integral apron eliminates installation step.
- 18" (457 mm) bath depth (floor to top of threshold).
- 2" wainscot allows tile installation above bath deck
- 60" (1524 mm) x 32" (813 mm) x 20" (508 mm) complete unit finished dimensions.

## Material

- Compression molded from our exclusive solid Vikrell® material.

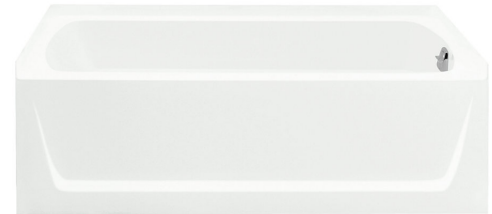

ADA

## Codes/Standards

CSA B45.5/IAPMO Z124  
ASTM E162  
ASTM E662  
Greenguard UL 2818 - Gold  
ADA  
ICC/ANSI A117.1  
HUD, UM Bulletin 73



## STERLING® Warranty - Fixtures Made of Solid Vikrell Material

See website for detailed warranty information.

## Available Color/Finishes

*Color tiles intended for reference only.*

| Color | Code | Description |
|-------|------|-------------|
|-------|------|-------------|


- |  |    |         |
|--|----|---------|
|  | 0  | White   |
|  | 96 | Biscuit |

USA/Canada: 1-800-STERLING (1-800-783-7546)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to [www.sterlingplumbing.com](http://www.sterlingplumbing.com).

3-27-2016 06:00

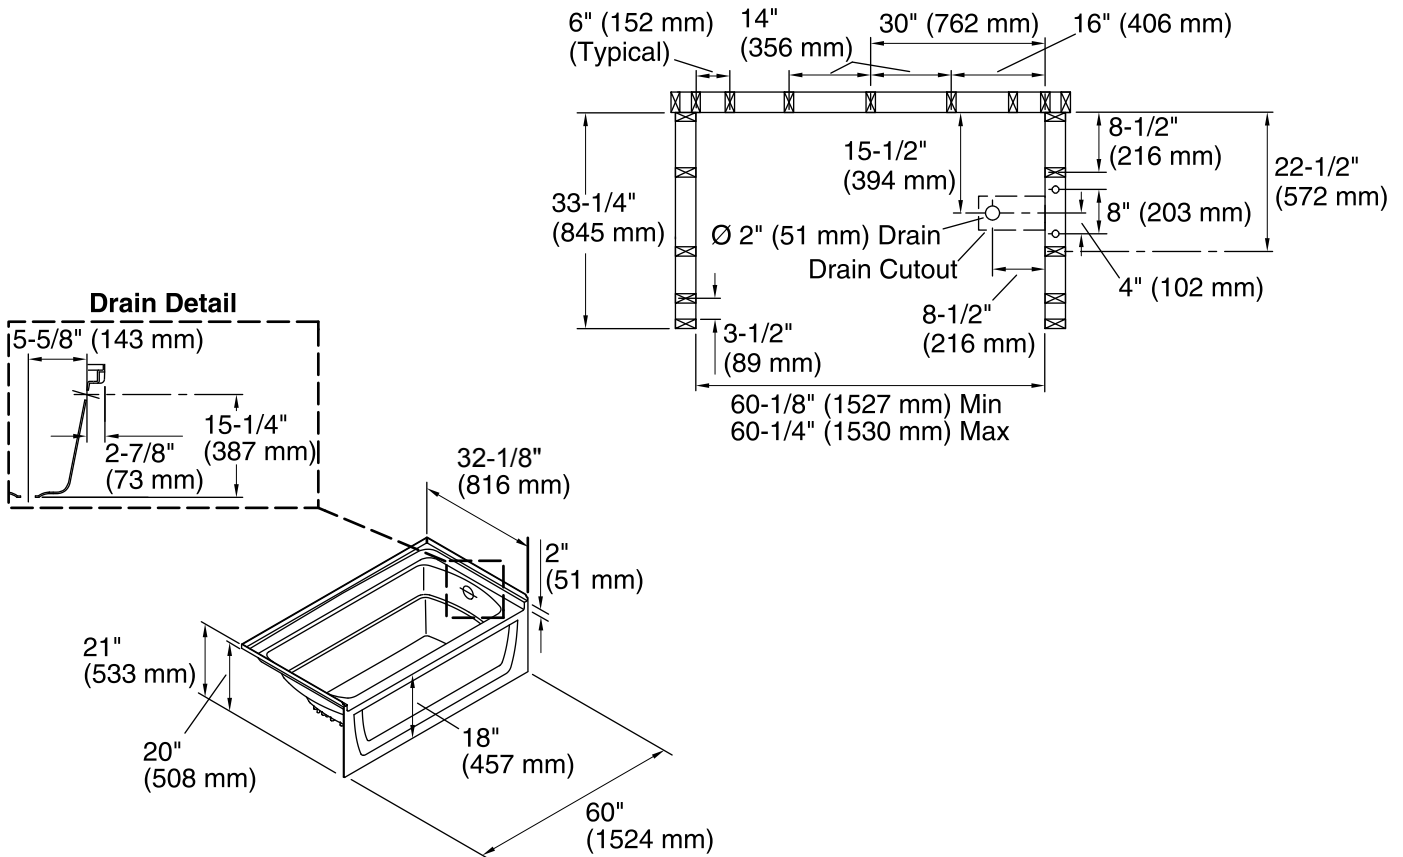

### Technical Information

All product dimensions are nominal.

|                        |                              |
|------------------------|------------------------------|
| Installation:          | 3-Wall Alcove                |
| Drain location:        | Right                        |
| Basin area, bottom:    | 42" x 20" (1067 mm x 508 mm) |
| Basin area, top:       | 54" x 26" (1372 mm x 660 mm) |
| Water depth:           | 13-3/4" (349 mm)             |
| Water capacity:        | 55 gal (208.2 L)             |
| Minimum flat for door: | 3" (76 mm)                   |
| Door width required:   | 57-11/16" (1465 mm)          |

### Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Studs should be positioned roughly as shown.

Double studing is recommended for pivot shower door installations.

ADA compliant when installed to the specific requirements of these regulations.