

Features

- Fixture-mount design
- Chloramine resistance on all rubber components exposed to waterway
- Includes vacuum breaker and control stop

Material

- Durable brass construction

Technology

- Nonhold open piston technology for accurate activation

Installation

- Intended for urinal installations with 3/4" (19 mm) top spud coupling connection
- Self-cleaning brass piston prevents clogging and reduces maintenance

Recommended Products/Accessories

K-23723 Faucet cleaner



Codes/Standards

ASSE 1037/ASME A112.1037/CSA B125.37
EPA WaterSense®
ADA
ICC/ANSI A117.1
CSA B651
OBC
IAPMO Certification

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.


Available Colors/Finishes

Color tiles intended for reference only.

| Color | Code | Description |
|-------|------|-------------|
|-------|------|-------------|

| | | |
|---|----|-----------------|
|  | CP | Polished Chrome |
|---|----|-----------------|

*10-3/4" (273 mm) minimum with a
6" (152 mm) critical level above the fixture

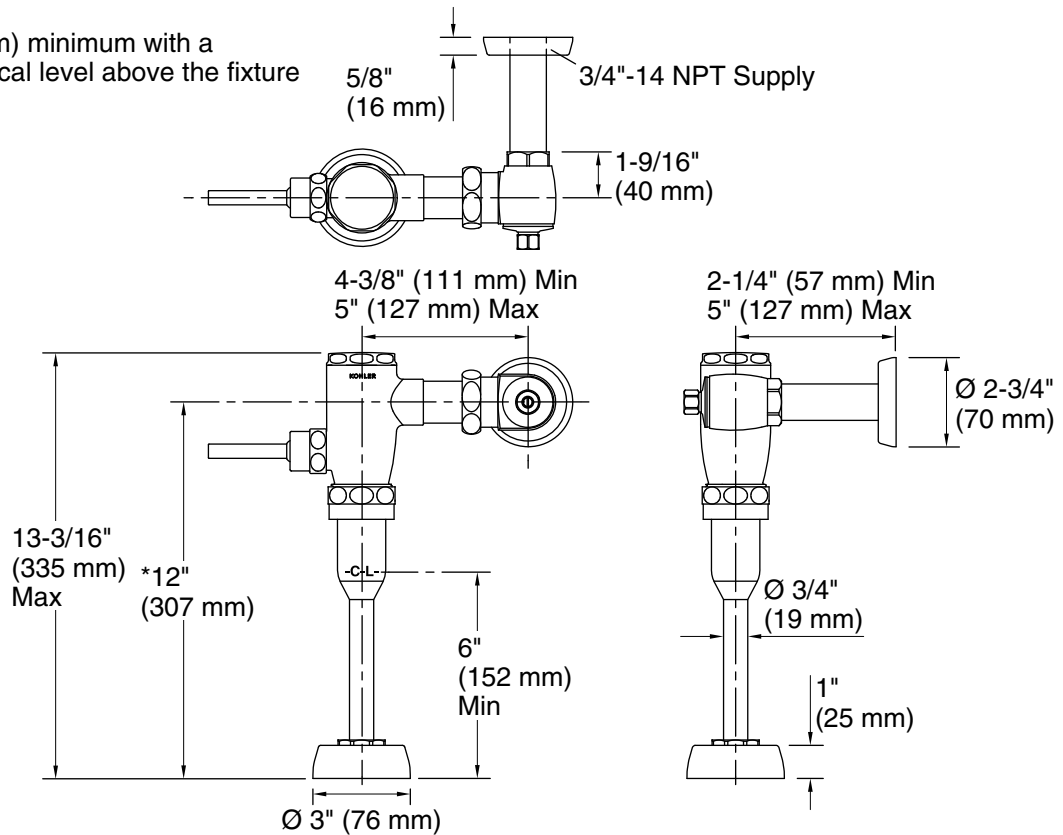

Technical Information

All product dimensions are nominal.

Pressure/fixture Supply Requirements

| | |
|--------------------------------|--------------------|
| Fixture pressure max (static): | 80 psi (551.6 kPa) |
| Fixture pressure min (static): | 25 psi (172.4 kPa) |
| Min flowing pressure: | 25 psi (172.4 kPa) |
| Min flow rate: | 3.5 gpm (13.2 lpm) |

Notes

Install this product according to the installation guide.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.