



# Underscore® | K-5713

59-3/4" x 35-3/4" drop-in bath

## Features

- Integral lumbar support
- Oval basin creates a spacious bathing experience
- Slotted overflow allows for deep soaking



## Available Colors/Finishes

*Color tiles intended for reference only.*

- 0 White
- 96 Biscuit
- 7 Black Black



1-800-4KOHLER (1-800-456-4537)  
Kohler Co. reserves the right to make revisions without notice to product specifications.  
For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.  
4-15-2026 5:14 - US-CA

THE BOLD LOOK  
OF **KOHLER**

---

## Codes/Standards

CSA B45.5/IAPMO Z124  
ASTM E162  
ASTM E662

## Warranty

See website for detailed warranty information.

KOHLER® Plastic Baths and Shower Bases Lifetime Limited Warranty

---

## Technical Information

*All product dimensions are nominal.*

Drain Location:	Center
Drain Hole Diameter:	2-3/16" (56 mm)
Basin Area, Bottom:	43" x 25-5/8" (1093 mm x 651 mm)
Basin Area, Top:	55-9/16" x 28-3/8" (1411 mm x 720 mm)
Water Depth:	16-5/16" (415 mm)
Water Capacity:	72.017 gal (272.6 L)
Minimum Floor Load:	45.8 lbs/ft <sup>2</sup>
Weight:	85 lbs (38.6 kg)

---

## Material

- Acrylic

---

## Recommended Products/Accessories

K-23726 Drain treatment

K-23732 Tub & shower cleaner

K-814 Undermount kit for select 59-15/16" Underscore bath and whirlpool bath models

---

## Required Products/Accessories

- K-7271 Slotted overflow brass bath drain

or

- K-7272 Slotted overflow bath drain




1-800-4KOHLER (1-800-456-4537)



Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.



4-15-2026 5:14 - US-CA

No change in measurements if connected with drain illustrated. (K-7272)

 Recommended Faucet Location

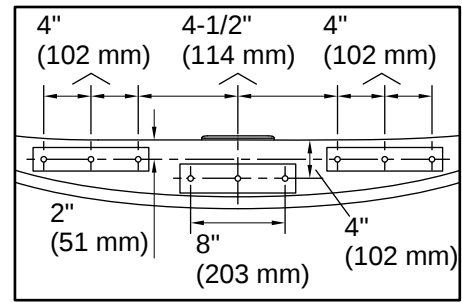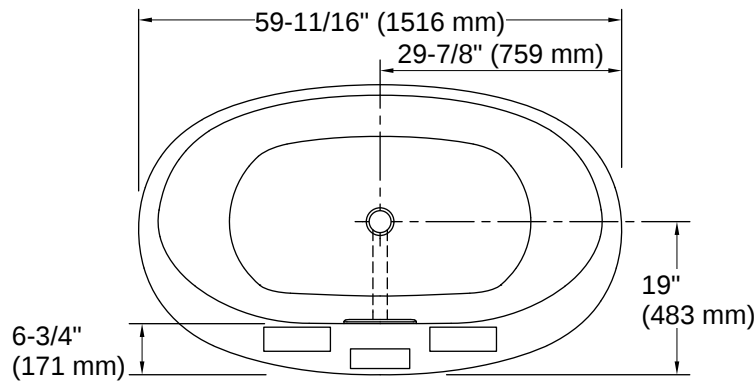

Recommended Faucet Hole Location

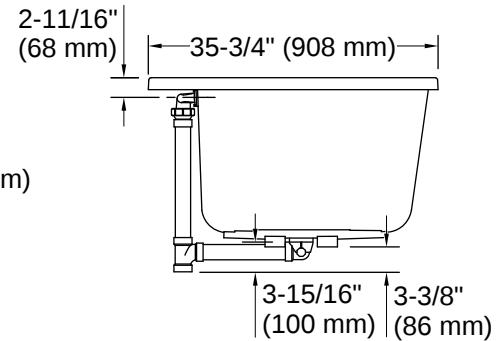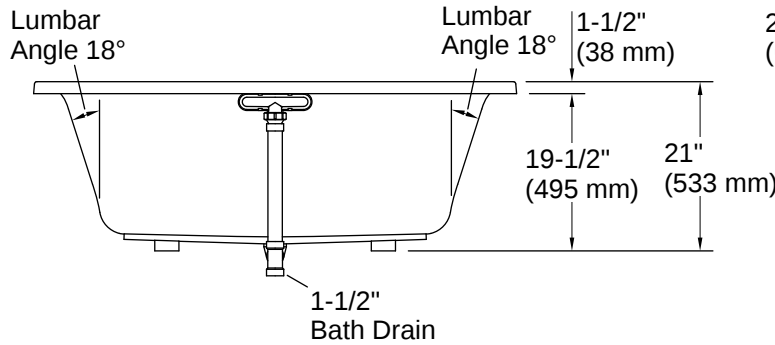

## Installation

- Requires Clearflo slotted overflow bath drain (sold separately)
- Center drain
- Drop-in or undermount

## Installation Notes

*Install this product according to the installation instructions.*

Measure your actual product for rough-in details.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Kit is required for under-mount installations (sold separately).

If installing a rim-mount faucet, make sure there is no interference with drain overflow before drilling any holes. Consult local and national codes for minimum air gap requirements if installing a spout on the faucet deck.

