

PLASTIC & CAST IRON **TWO FINGER FLANGE**



PLASTIC
Two Finger Flange





CAST IRON
Two Finger Flange*



- * 3" x 2", 4" x 2" and 4" x 3": for areas with the bend close to the flange
- * 3" x 4", 4" x 4" and 4" x 6": for areas without the bend close to the flange or broken pipe

Two Finger Flange

- Positive seal
- Redesigned to fit oblong horns
- Easy to push to install or adjust
- Flush fit
- Choice of closet bolt slots or slide positioning
- Double lip seal gasket
- May be used on PVC, ABS, or Cast Iron pipe and on old lead pipe that is in good condition
- Pushes easily into 3" or 4" cast iron or Schedule 40 DWV PVC pipe
- ASTM C-564 rubber gasket
- No tear out or caulking required of existing pipe
- Patent #: 5,937,450

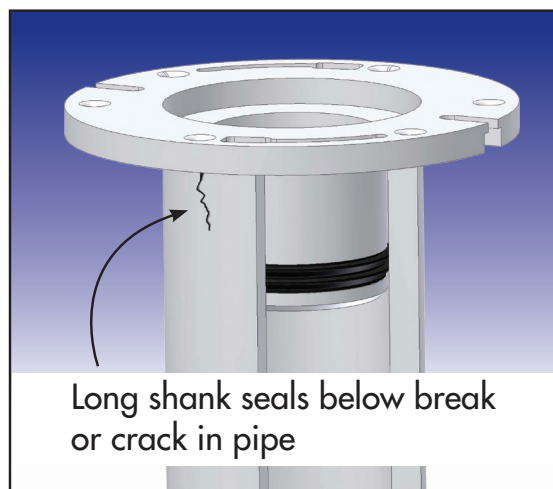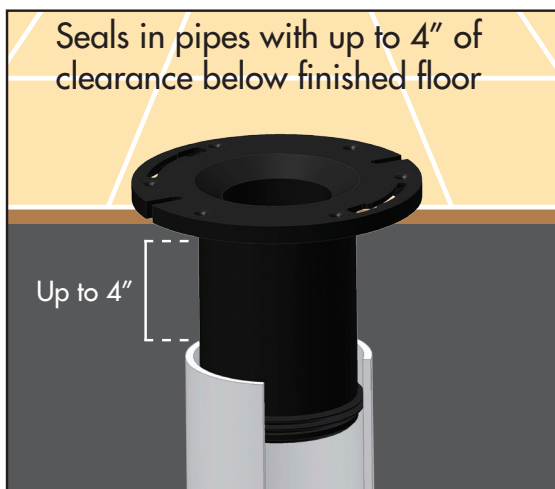

00861-01



JSC South
3249 Moody Parkway
Moody, AL 35004
Phone 800-355-6637
Fax 800-462-6991

JSC North
50 Keystone Blvd. East
Pottsville, PA 17901
Phone 800-325-8999
Fax 866-922-0076

Two Finger Flange

- Positive seal
- Redesigned to fit oblong horns
- Easy to push to install or adjust
- Flush fit
- Choice of closet bolt slots or slide positioning
- Double lip seal gasket
- May be used on PVC, ABS, or Cast Iron pipe and on old lead pipe that is in good condition
- Pushes easily into 3" or 4" cast iron or Schedule 40 DWV PVC pipe
- ASTM C-564 rubber gasket
- No tear out or caulking required of existing pipe
- Patent #: 5,937,450



PLASTIC
Two Finger Flange

PART NO.	SIZE	MATERIAL	CTN QTY
C4733P	3" x 3"	WHITE PLASTIC	6
C4733A	3" x 3"	BLACK PLASTIC	6
C4743P	4" x 3"	WHITE PLASTIC	6
C4743A	4" x 3"	BLACK PLASTIC	6



CAST IRON
Two Finger Flange*

PART NO.	SIZE	MATERIAL	CTN QTY
C47320	3" x 2"	CAST IRON	8
C47340	3" x 4"	CAST IRON	4
C47420	4" x 2"	CAST IRON	8
C47430	4" x 3"	CAST IRON	4
C47440	4" x 4"	CAST IRON	4
C47460	4" x 6"	CAST IRON	2

* 3" x 2", 4" x 2" and 4" x 3": for areas with the bend close to the flange

* 3" x 4", 4" x 4" and 4" x 6": for areas without the bend close to the flange or broken pipe

Contact a Jones Stephens Representative for more information.
Specifications and pricing available upon request.