

Features

- Brass construction.
- Single-hole mounting.
- Above-counter battery and valve for easy installation and maintenance.
- Vandal-resistant aerator.
- 24" (610 mm) flexible supply hoses for easy installation.
- 5" (127 mm) spout reach.
- Stationary spout.
- Without temperature mixer.
- Includes two AAA batteries.
- Less drain.
- 0.5 gal/min (1.9 l/min) maximum flow rate [max at 60 psi (4.14 bar)].



For complete listing of available colors, go to kohler.com.

ADA **CSA B651** **OBC**

Codes/Standards

ASME A112.18.1/CSA B125.1

NSF 372

ADA

ICC/ANSI A117.1

DOE - Energy Policy Act 1992

CSA B651

OBC

All applicable US Federal and State material regulations

FCC Part 15

ICES-003

KOHLER® Electronic Faucets, Valves, and Controls - Five-Year Limited Warranty

See website for detailed warranty information.


Product Specification

Electronic faucet shall be 5" (127 mm) spout reach and 4-7/8" (124 mm) spout outlet height. Electronic faucet shall be made of brass construction.

Electronic faucet shall be less drain. Electronic faucet shall be without temperature mixer.

Electronic faucet shall be single-hole installation.

Electronic faucet shall be KOHLER Model K-13461.

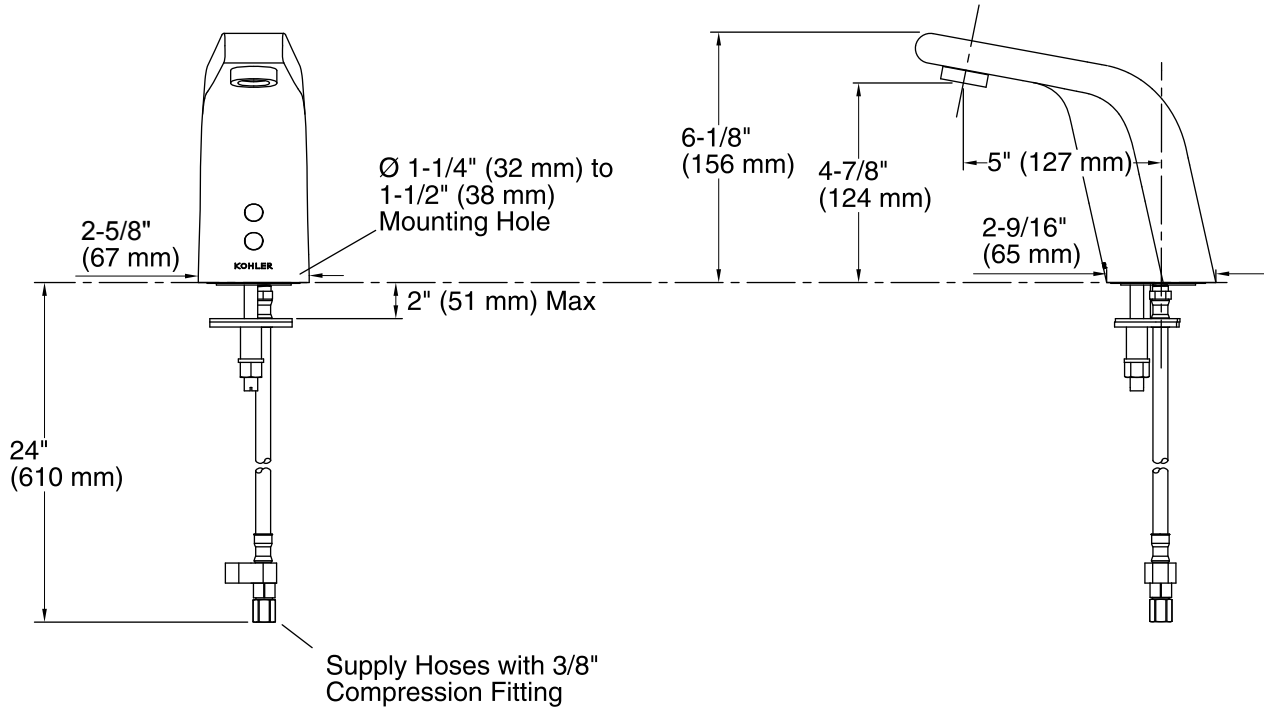

Technical Information

All measurements are nominal.

Valve body:	Machined Brass
Faucet:	
Flow rate:	0.5 gal/min (1.9 l/min)
Pressure:	60 psi (4.1 bar)
Power source:	AAA 1.5 V, included

Installation Notes

Install this product according to the installation guide.

A $1\text{-}1/4\text{''}$ (32 mm) minimum to $1\text{-}1/2\text{''}$ (38 mm) maximum diameter mounting hole is required.

The minimum distance between the back of the faucet spout and the wall must be $1\text{-}3/4\text{''}$ (44 mm). This will allow proper clearance for setscrew access.

The maximum distance between the bathroom sink basin edge to the base of the faucet spout must be $1\text{-}3/4\text{''}$ (44 mm).

The maximum height of the lip basin should be $3/4\text{''}$ (19 mm).

Product includes rosebud spray aerator. Other aerator styles are available.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.