

4" SQUARE BOXES

1-1/4" AND 1-1/2" DEEP/CONDUIT

Applications


- Boxes are installed in walls or ceilings for lighting fixtures, switches or receptacles
- Square boxes are used where multiple conductor runs are split into two or more directions to bring power to a number of electrical devices
- Drawn boxes are ideal for exposed work applications

Product Features


- Combination screw heads provide for faster installation
- Thru-the-wall box is designed for shallow wall applications and allows for attachment of wall plate to both faces of box
- TKO® knockouts offer greater flexibility with RACO® patented combination 1/2" and 3/4" knockout
- TKO® knockouts allow for design and installation flexibility
- UBS Support - Welded to box, preset bend points to work with wall thickness 2-1/2" to 6"
- Red boxes, covers and extensions for dedicated life safety alarm circuits

Compliances

-  - File E195978

 All RACO® single gang, two gang, 4" square, and single gang gangable U.L. listed steel boxes are acceptable for use in 2-hour fire rated walls. For additional information, consult U.L. "Fire Resistance Directory" or the U.L. website at www.ul.com

600V Per U.L. 514-A, suitable for use without a bonding jumper in circuits up to 600 volts

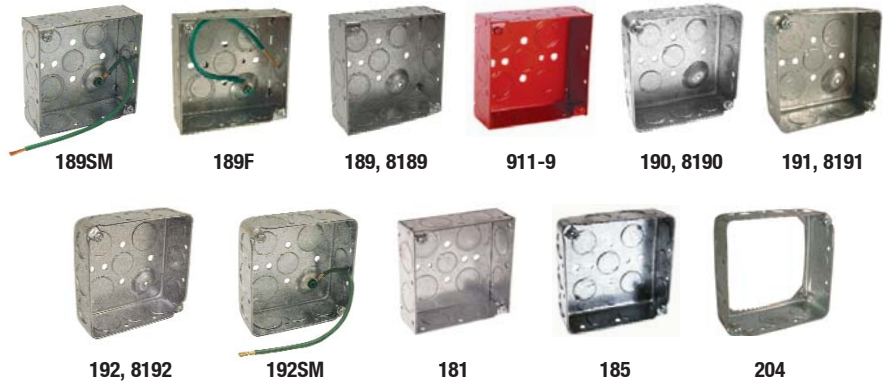

ORDERING INFORMATION - DIMENSIONS

4" SQUARE - 1-1/4" DEEP (INSIDE) - DRAWN WITH CONDUIT KO'S - 18.0 CUBIC INCHES

CATALOG NUMBER	UBS FAR SIDE SUPPORT	KNOCKOUTS		STD. PKG.	RAISED GROUND PROVISION	PIG-TAIL	UPC BAR CODE
		SIDES COND.	BOTTOM COND.				
185	—	10-1/2"	5-1/2"	50	No	No	

4" SQUARE - 1-1/2" DEEP (INSIDE) - DRAWN WITH CONDUIT KO'S - 21.0 CUBIC INCHES

CATALOG NUMBER	UBS FAR SIDE SUPPORT	KNOCKOUTS		STD. PKG.	RAISED GROUND PROVISION	PIG-TAIL	UPC BAR CODE
		SIDES	BOTTOM				
		COND.	COND.				
190	—	12-1/2"	4-1/2"	50	Yes	No	
8190	—	12-1/2"	4-1/2"	50	Yes	No	
191	—	8-3/4"	1-1/2", 3-3/4"	50	Yes	No	
8191	—	8-3/4"	1-1/2", 3-3/4"	25	Yes	No	
192	—	8-1/2", 4-3/4"	2-1/2", 2-3/4"	50	Yes	No	
8192	—	8-1/2", 4-3/4"	2-1/2", 2-3/4"	50	Yes	No	
192SM	—	8-1/2", 4-3/4"	2-1/2", 2-3/4"	50	Yes	Yes	

4" SQUARE - 1-1/2" DEEP (INSIDE) - WELDED WITH CONDUIT KO'S - 21.0 CUBIC INCHES

CATALOG NUMBER	UBS FAR SIDE SUPPORT	KNOCKOUTS		STD. PKG.	RAISED GROUND PROVISION	PIG-TAIL	UPC BAR CODE
		SIDES COND.	BOTTOM COND.				
181	—	8-3/4"	1-1/2", 4-3/4"	50	No	No	—
600V 189	—	8-1/2", 4-TKO®	2-1/2", 2-TKO®	50	Yes	No	—
600V 8189	—	8-1/2", 4-TKO®	3-1/2", 2-TKO®	50	No	No	
600V 189SM	—	8-1/2", 4-TKO®	2-1/2", 2-TKO®	50	Yes	Yes	—
600V 189F	Yes	8-1/2", 4-TKO®	2-1/2", 2-TKO®	50	Yes	Yes	—
600V 911-9	—	8-1/2", 4-TKO®	3-1/2", 2-TKO®	50	No	No	—

4" SQ. - THRU-THE-WALL BOX - 1-1/2" DEEP (INSIDE) - DRAWN WITH CONDUIT KO'S - 22.5 CU. IN.

CATALOG NUMBER	UBS FAR SIDE SUPPORT	KNOCKOUTS		CU. IN.	STD. PKG.	PIG-TAIL	UPC BAR CODE
		SIDES COND.	BOTTOM COND.				
204	—	8-1/2", 4-3/4"	—	22.5	50	No	—

 4714, THE INSIDER® will secure nonmetallic sheathed cable in 1/2" KO (See pg. B87)